


MULTIPLE PIPE EMBEDMENT

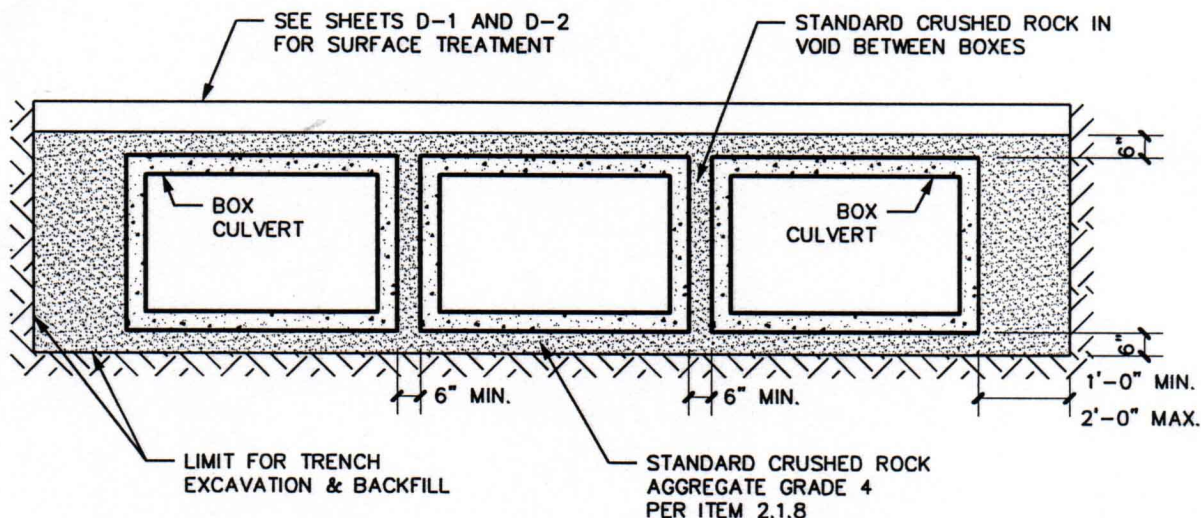

MULTIPLE BOX EMBEDMENT

NOTES:

1. AT THE END OF EACH WORK DAY ALL SPOILS SHALL BE REMOVED FROM THE CITY & TxDOT R.O.W. UNLESS PRIOR WRITTEN PERMISSION IS OBTAINED FROM THE OWNER TO STORE SPOILS IN DESIGNATED SPOIL STORAGE AREAS THAT DO NOT OBSTRUCT AUTOMOBILE OR PEDESTRIAN TRAFFIC.
2. ALL BACKFILL SHALL BE PER SPEC. ITEM 6.2 AND SHALL BE COMPACTED PER SPEC. ITEM 6.2.9 (b). ROCKS GREATER THAN 4" IN DIA. SHALL BE REMOVED FROM ANY NATIVE MATERIAL USED AS BACKFILL.
3. ALL PAVEMENT SHALL BE REMOVED ALONG NEAT SAW-CUT LINES PER SPEC. ITEM 8.8.
4. A MAX. OF 200 FT. OF OPEN TRENCH WILL BE ALLOWED AT ANY TIME, UNLESS APPROVED BY THE CITY ENGINEER.
5. IN SANDY SOILS THE CRUSHED ROCK EMBEDMENT SHALL BE WRAPPED IN A FILTER FABRIC.
6. TOPSOIL SHALL BE 4 INCHES IN DEPTH AND SHALL BE LOOSE AND FREE OF ROCKS OR CLODS GREATER THAN 1/4" IN DIAMETER. ALL TOPSOIL SHALL BE APPROVED BY THE OWNER PRIOR TO INSTALLATION.



**CITY OF
DECATUR**

**DRAINAGE SYSTEM CONSTRUCTION DETAILS
STORM SEWER EMBEDMENT & BACKFILL**

REVISED MAR 2000

SCALE: 1" = 2'

SHEET: D-1C